




DESIGNED & DIMENSIONED
IN MILLIMETERS [INCHES]

DCA-ACR-22-M-X

SIZE
METAL


KEYING FEATURE COLOR
(SEE TABLE 1)
-1: ORANGE
-2: GREEN
-3: BLUE
-4: YELLOW

DO NOT
SCALE FROM
THIS PRINT

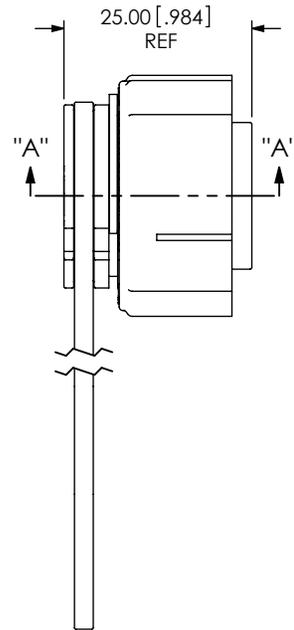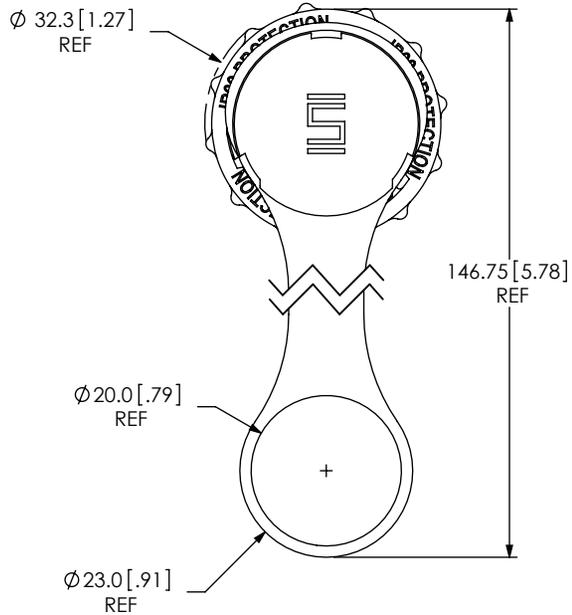


SECTION "A"- "A"

APPLICATION VIEW

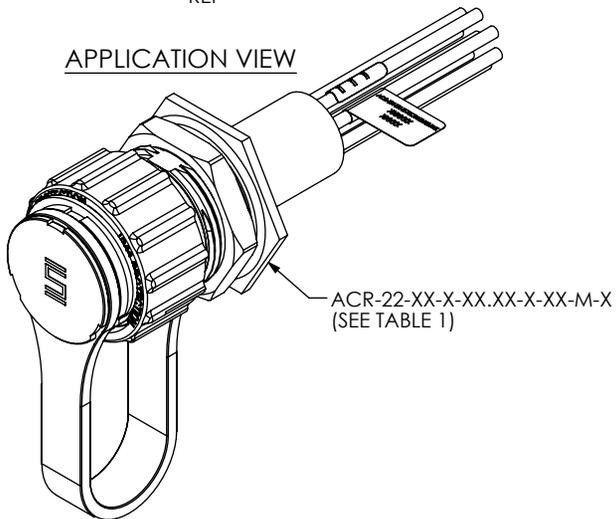

IN-PROCESS
PUSH ACCLS-22-M OVER DC-ACR-22-M UNTIL IT BOTTOMS OUT AGAINST FLANGE. SNAP ACCRT-22 (RETAINING RING) INTO GROOVE IN DC-ACR-22-M TO HOLD ACCLS-22-M IN PLACE. STRETCH ACCL-22-X OVER DC-ACR-22-M UNTIL IT SEATS IN GROOVE.

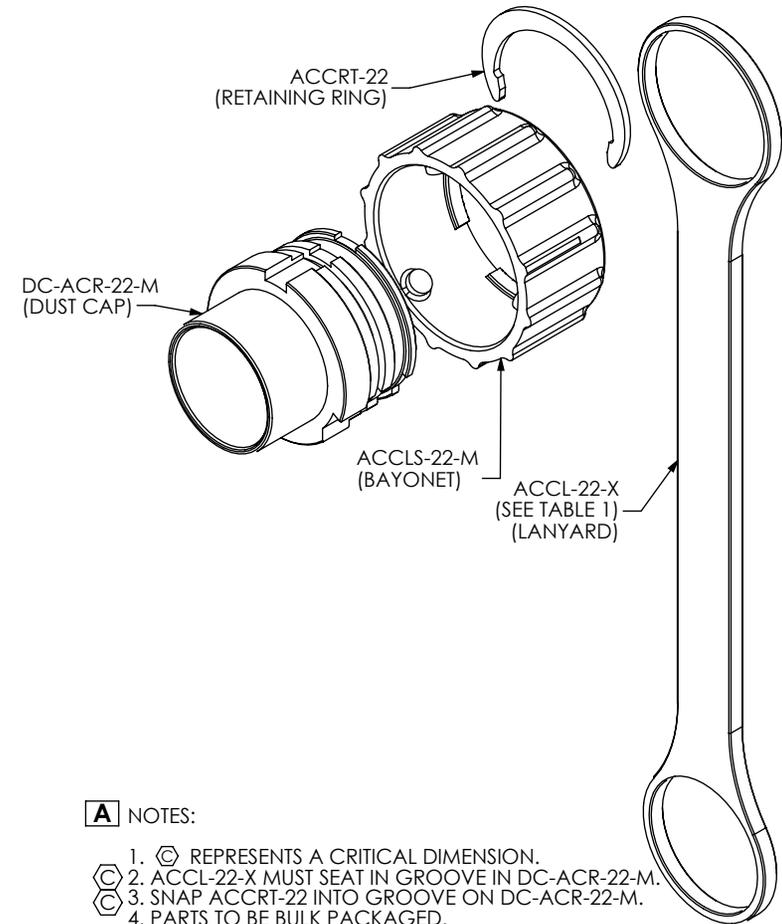

A NOTES:

1. (C) REPRESENTS A CRITICAL DIMENSION.
2. ACCL-22-X MUST SEAT IN GROOVE IN DC-ACR-22-M.
3. SNAP ACCRT-22 INTO GROOVE ON DC-ACR-22-M.
4. PARTS TO BE BULK PACKAGED.

TABLE 1		
CORRESPONDING CABLE PART NUMBER	KEYING FEATURE COLOR	ACCL-22-X
ACR-22-XX-X-XX.XX-X-XX-M-1	-1	ACCL-22-1
ACR-22-XX-X-XX.XX-X-XX-M-2	-2	ACCL-22-2
ACR-22-XX-X-XX.XX-X-XX-M-3	-3	ACCL-22-3
ACR-22-XX-X-XX.XX-X-XX-M-4	-4	ACCL-22-4

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. TOLERANCES ARE:
DECIMALS ANGLES
X.X: ±0.3 [.01] 2°
X.XX: ±0.13 [.005]
X.XXX: ±0.051 [.0020]

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

MATERIAL: DO NOT SCALE DRAWING SHEET SCALE: 1:1
DC-ACR-22-M: ZAMAK 3
ACCLS-22-M: ZAMAK 3
ACCRT-22: STAINLESS STEEL
ACCL-22-X: SILICONE



520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code 53322

DESCRIPTION:
ACCLIMATE CIRC. PANEL DUST CAP

DWG. NO. DCA-ACR-22-M-X

BY: VICKY Z 10/12/2010 SHEET 1 OF 1