

## THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Material	High Conductivity Seamless Copper Tube  Electro-Tin  250 kcmil  Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric  1-11/16 in.		
Plating			
Wire Size			
Wire Type			
Wire Strip Length			
Stud Size	1/2 in.		
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.		
UL Temperature Rating	90° C		
C.S.A Certified Wire Connector	Yes		
Panduit Color Code on Barrel	YELLOW		
Panduit Die Index No. on Barrel	P62		
Alternate Industry Die Index No. () on Barrel	(16)		





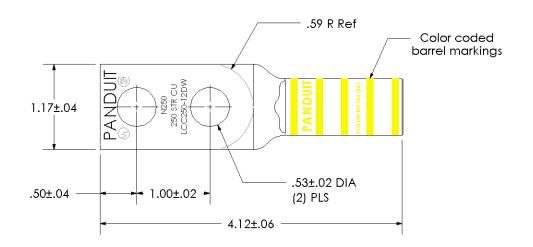

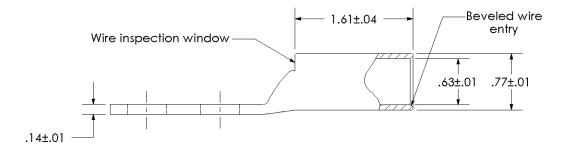

						CORP. TINLEY PARK, ILLINOIS
						LCC250-12DW-X
00	9/02	SAB	DRL	RELEASED	10340	Copper Lug - Two-Hole, Long Barrel with Window
REV	DATE	BY	снк	DESCRIPTION	ECN	SCALE N/A DRAWING NO / CAD FILE LCC250-12DW-CUST