

# International **IR** Rectifier

PD - 95202

## IRF7402PbF

HEXFET® Power MOSFET

- Generation V Technology
- Ultra Low On-Resistance
- N-Channel MOSFET
- Very Small SOIC Package
- Low Profile (<1.1mm)
- Available in Tape & Reel
- Fast Switching
- Lead-Free

### Description

Fifth Generation HEXFET® power MOSFETs from International Rectifier utilize advanced processing techniques to achieve extremely low on-resistance per silicon area. This benefit, combined with the fast switching speed and ruggedized device design that HEXFET power MOSFETs are well known for, provides the designer with an extremely efficient and reliable device for use in a wide variety of applications.


The SO-8 has been modified through a customized leadframe for enhanced thermal characteristics and multiple-die capability making it ideal in a variety of power applications. With these improvements, multiple devices can be used in an application with dramatically reduced board space. The package is designed for vapor phase, infrared or wave soldering techniques. Power dissipation of greater than 0.8 W is possible in a typical PCB mount application.

### Absolute Maximum Ratings


	Parameter	Max.	Units
I <sub>D</sub> @ T <sub>A</sub> = 25°C	Continuous Drain Current, V <sub>GS</sub> @ 4.5V	6.8	A
I <sub>D</sub> @ T <sub>A</sub> = 70°C	Continuous Drain Current, V <sub>GS</sub> @ 4.5V	5.4	
I <sub>DM</sub>	Pulsed Drain Current ①	54	
P <sub>D</sub> @ T <sub>A</sub> = 25°C	Power Dissipation	2.5	W
P <sub>D</sub> @ T <sub>A</sub> = 70°C	Power Dissipation	1.6	
	Linear Derating Factor	0.02	W/°C
V <sub>GS</sub>	Gate-to-Source Voltage	± 12	V
dv/dt	Peak Diode Recovery dv/dt ②	5.0	V/ns
T <sub>J</sub> , T <sub>STG</sub>	Junction and Storage Temperature Range	-55 to + 150	°C

### Thermal Resistance

	Parameter	Max.	Units
R <sub>0JA</sub>	Maximum Junction-to-Ambient ④	50	°C/W



V<sub>DSS</sub> = 20V  
R<sub>DS(on)</sub> = 0.035Ω



# IRF7402PbF


International  
Rectifier

## Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
$V_{(\text{BR})\text{DSS}}$	Drain-to-Source Breakdown Voltage	20	—	—	V	$V_{\text{GS}} = 0\text{V}$ , $I_D = 250\mu\text{A}$
$\Delta V_{(\text{BR})\text{DSS}/\Delta T_J}$	Breakdown Voltage Temp. Coefficient	—	0.024	—	V/ $^\circ\text{C}$	Reference to $25^\circ\text{C}$ , $I_D = 1\text{mA}$
$R_{\text{DS}(\text{on})}$	Static Drain-to-Source On-Resistance	—	0.035	—	$\Omega$	$V_{\text{GS}} = 4.5\text{V}$ , $I_D = 4.1\text{A}$ ③
		—	0.050	—	$\Omega$	$V_{\text{GS}} = 2.7\text{V}$ , $I_D = 3.5\text{A}$ ③
$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	0.70	—	—	V	$V_{\text{DS}} = V_{\text{GS}}$ , $I_D = 250\mu\text{A}$
$g_{\text{fs}}$	Forward Transconductance	6.1	—	—	S	$V_{\text{DS}} = 10\text{V}$ , $I_D = 1.9\text{A}$
$I_{\text{DSS}}$	Drain-to-Source Leakage Current	—	—	1.0	$\mu\text{A}$	$V_{\text{DS}} = 16\text{V}$ , $V_{\text{GS}} = 0\text{V}$
		—	—	25	$\mu\text{A}$	$V_{\text{DS}} = 16\text{V}$ , $V_{\text{GS}} = 0\text{V}$ , $T_J = 125^\circ\text{C}$
$I_{\text{GSS}}$	Gate-to-Source Forward Leakage	—	—	100	nA	$V_{\text{GS}} = 12\text{V}$
	Gate-to-Source Reverse Leakage	—	—	-100	nA	$V_{\text{GS}} = -12\text{V}$
$Q_g$	Total Gate Charge	—	14	22	nC	$I_D = 3.8\text{A}$
$Q_{\text{gs}}$	Gate-to-Source Charge	—	2.0	3.0		$V_{\text{DS}} = 16\text{V}$
$Q_{\text{gd}}$	Gate-to-Drain ("Miller") Charge	—	6.3	9.5		$V_{\text{GS}} = 4.5\text{V}$ , See Fig. 6 and 12 ③
$t_{\text{d}(\text{on})}$	Turn-On Delay Time	—	5.1	—	ns	$V_{\text{DD}} = 10\text{V}$
$t_r$	Rise Time	—	47	—		$I_D = 3.8\text{A}$
$t_{\text{d}(\text{off})}$	Turn-Off Delay Time	—	24	—		$R_G = 6.2\Omega$
$t_f$	Fall Time	—	32	—		$R_D = 2.6\Omega$ ③
$C_{\text{iss}}$	Input Capacitance	—	650	—	pF	$V_{\text{GS}} = 0\text{V}$
$C_{\text{oss}}$	Output Capacitance	—	300	—		$V_{\text{DS}} = 15\text{V}$
$C_{\text{rss}}$	Reverse Transfer Capacitance	—	150	—		$f = 1.0\text{MHz}$ , See Fig. 5

## Source-Drain Ratings and Characteristics

	Parameter	Min.	Typ.	Max.	Units	Conditions
$I_S$	Continuous Source Current (Body Diode)	—	—	2.5	A	MOSFET symbol showing the integral reverse p-n junction diode.
		—	—	54		
$I_{\text{SM}}$	Pulsed Source Current (Body Diode) ①	—	—	—	—	—
$V_{\text{SD}}$	Diode Forward Voltage	—	—	1.2	V	$T_J = 25^\circ\text{C}$ , $I_S = 3.8\text{A}$ , $V_{\text{GS}} = 0\text{V}$ ③
$t_{\text{rr}}$	Reverse Recovery Time	—	51	77	ns	$T_J = 25^\circ\text{C}$ , $I_F = 3.8\text{A}$
$Q_{\text{rr}}$	Reverse Recovery Charge	—	69	100	nC	$dI/dt = 100\text{A}/\mu\text{s}$ ③



### Notes:

① Repetitive rating; pulse width limited by max. junction temperature. (See fig. 11)


②  $I_{\text{SD}} \leq 3.8\text{A}$ ,  $dI/dt \leq 96\text{A}/\mu\text{s}$ ,  $V_{\text{DD}} \leq V_{(\text{BR})\text{DSS}}$ ,  $T_J \leq 150^\circ\text{C}$

③ Pulse width  $\leq 300\mu\text{s}$ ; duty cycle  $\leq 2\%$ .


④ When mounted on 1 inch square copper board,  $t < 10$  sec

⑤ This data sheet has curves & data from IRF7601


## IRF7402PbF

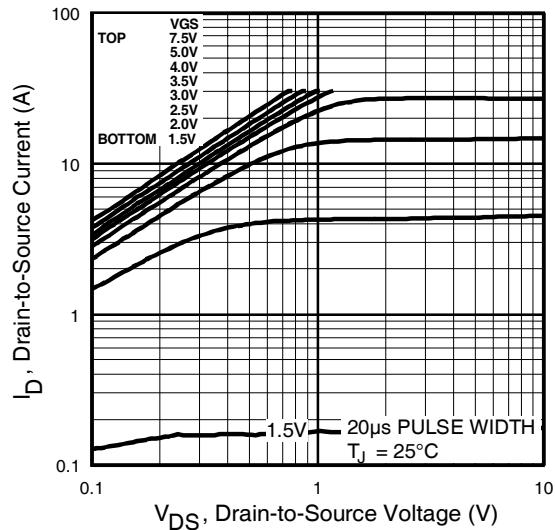


**Fig 1.** Typical Output Characteristics

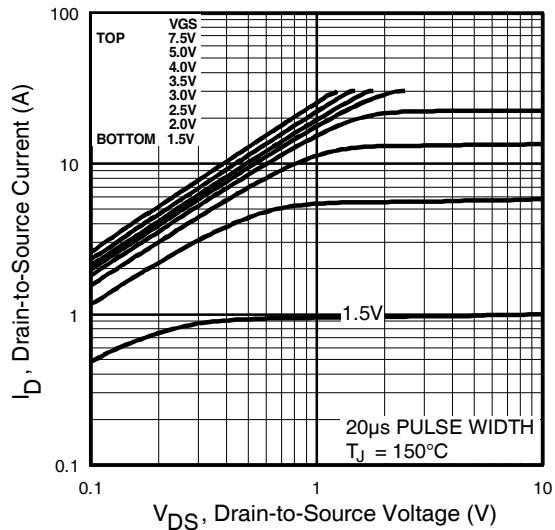

**Fig 2.** Typical Output Characteristics

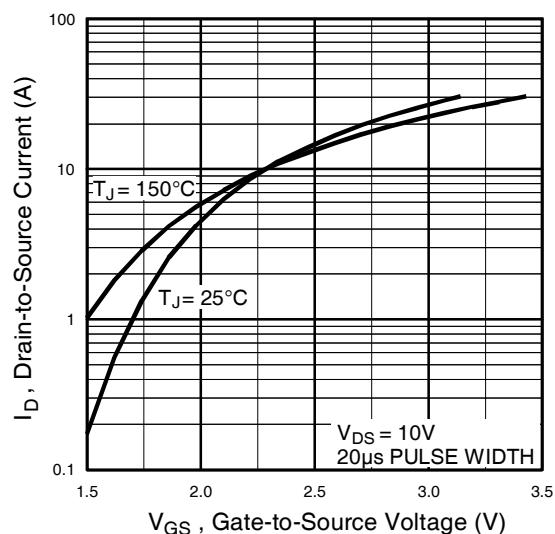


**Fig 3.** Typical Transfer Characteristics

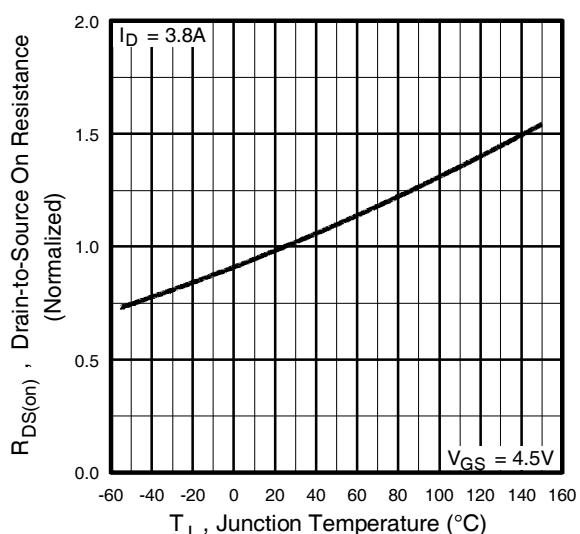


**Fig 4.** Normalized On-Resistance  
Vs. Temperature

# IRF7402PbF


International  
Rectifier

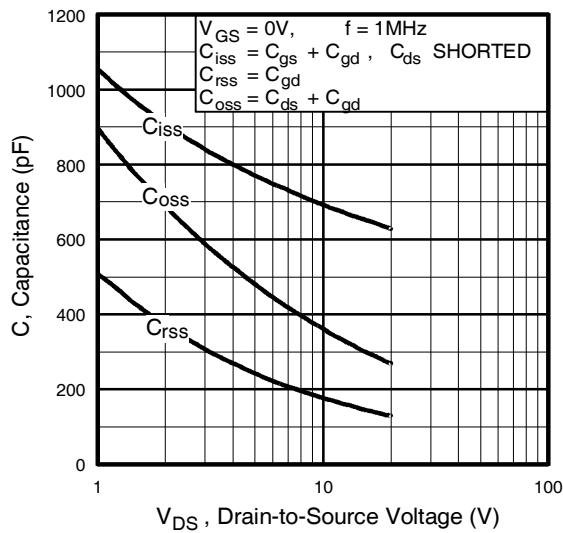


**Fig 5.** Typical Capacitance Vs.  
Drain-to-Source Voltage

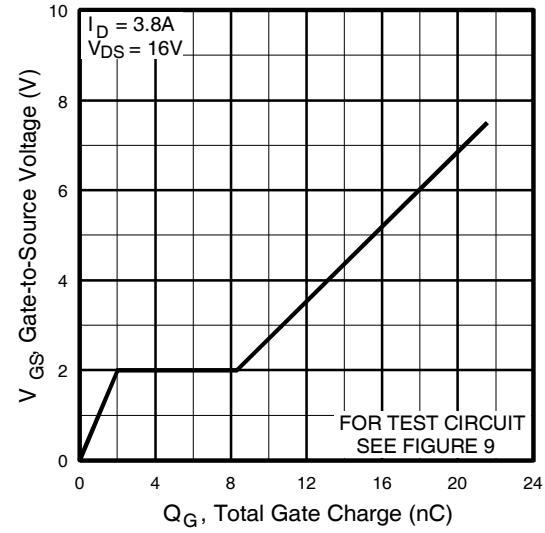


**Fig 6.** Typical Gate Charge Vs.  
Gate-to-Source Voltage

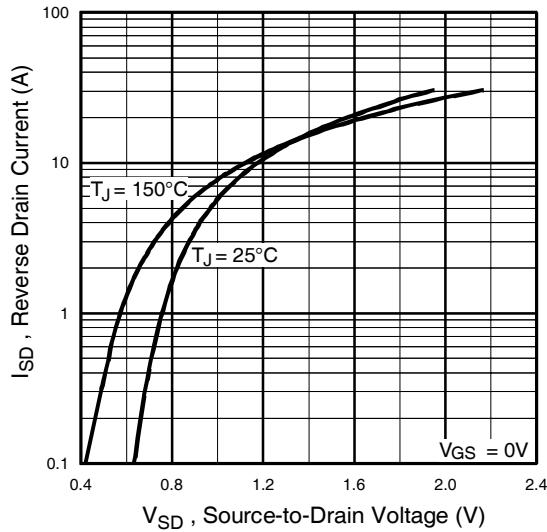


**Fig 7.** Typical Source-Drain Diode  
Forward Voltage

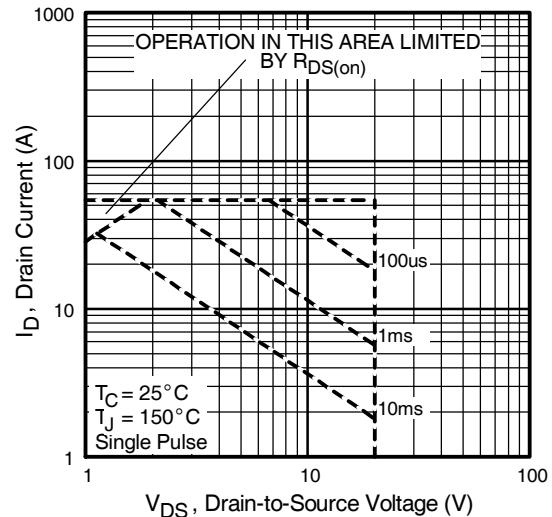


**Fig 8.** Maximum Safe Operating Area

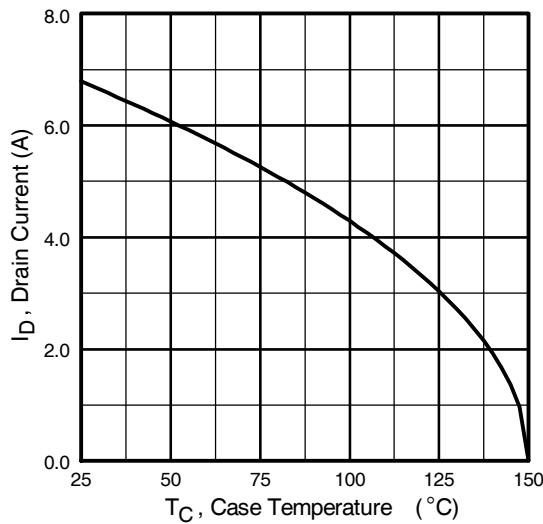


**Fig 9.** Maximum Drain Current Vs.  
Ambient Temperature

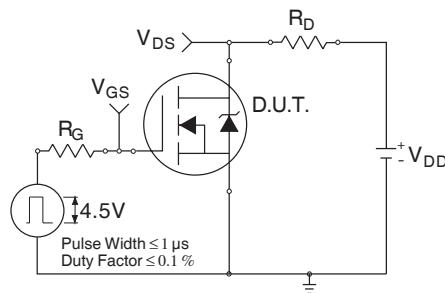

**Fig 10a.** Switching Time Test Circuit

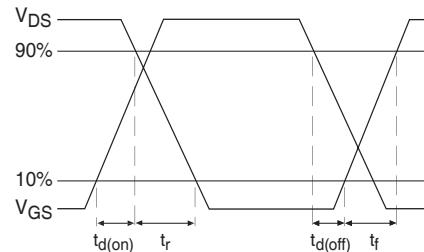


**Fig 10b.** Switching Time Waveforms

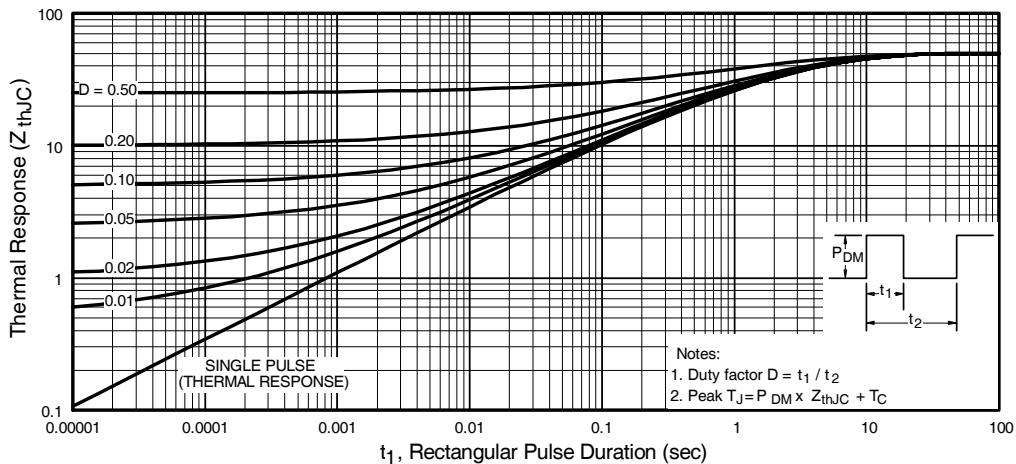


**Fig 11.** Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

# IRF7402PbF


International  
Rectifier

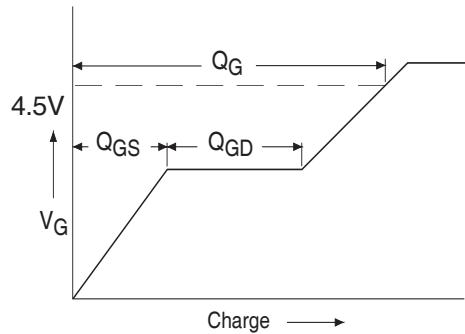


**Fig 12a.** Basic Gate Charge Waveform

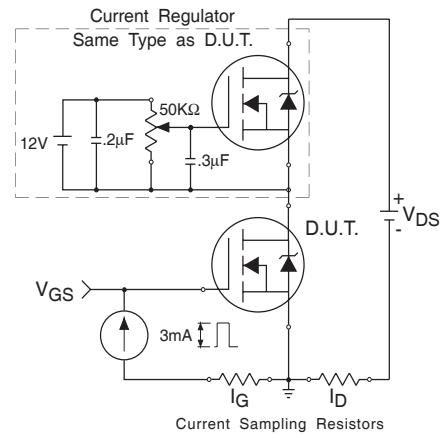

**Fig 12b.** Gate Charge Test Circuit

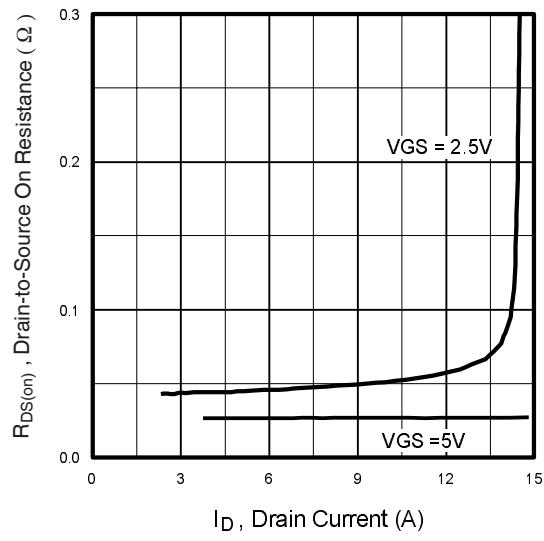


**Fig 13.** Typical On-Resistance Vs. Drain Current

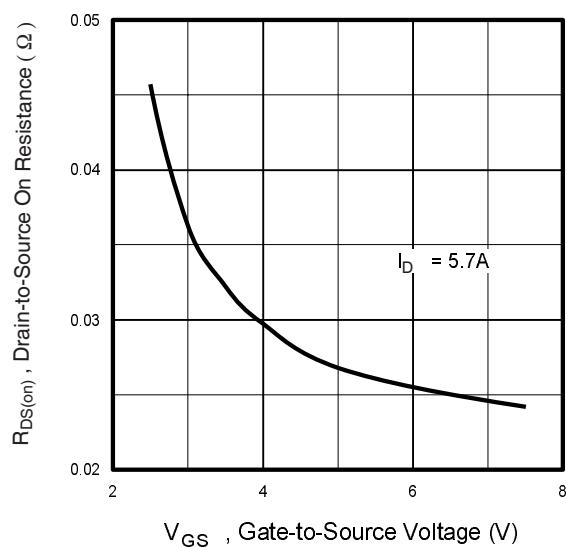



**Fig 14.** Typical On-Resistance Vs. Gate Voltage

## SO-8 Package Outline

Dimensions are shown in millimeters (inches)

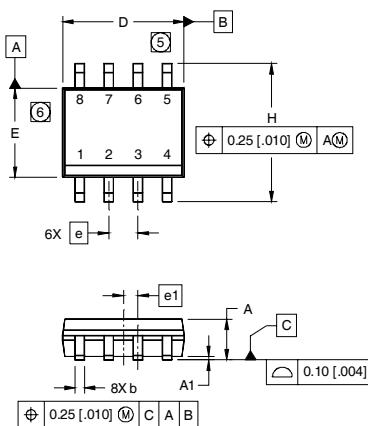


DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.0532	.0688	1.35	1.75
A1	.0040	.0098	0.10	0.25
b	.013	.020	0.33	0.51
c	.0075	.0098	0.19	0.25
D	.180	.1968	4.80	5.00
E	.1497	.1574	3.80	4.00
e	.050	BASIC	1.27	BASIC
e1	.025	BASIC	0.635	BASIC
H	.2284	.2440	5.80	6.20
K	.0099	.0196	0.25	0.50
L	.016	.050	0.40	1.27
y	0°	8°	0°	8°




## SO-8 Part Marking Information (Lead-Free)

EXAMPLE: THIS IS AN IRF7101 (MOSFET)

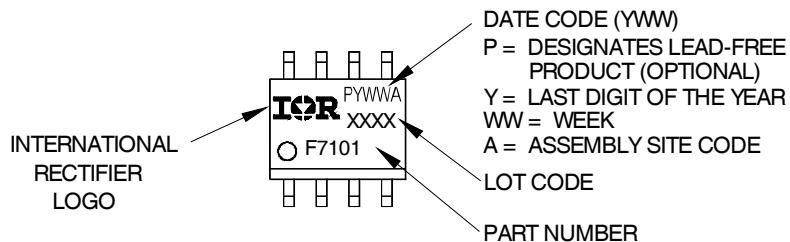


## SO-8 Tape and Reel

Dimensions are shown in millimeters (inches)

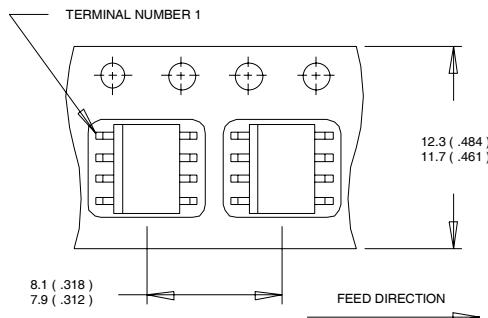

NOTES:

1. CONTROLLING DIMENSION : MILLIMETER.
2. ALL DIMENSIONS ARE SHOWN IN MILLIMETERS (INCHES).
3. OUTLINE CONFORMS TO EIA-481 & EIA-541.

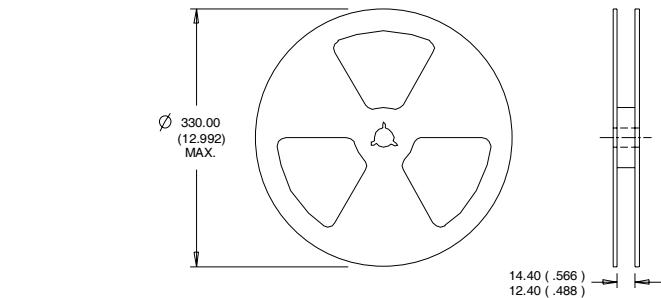

NOTES :

1. CONTROLLING DIMENSION : MILLIMETER.
2. OUTLINE CONFORMS TO EIA-481 & EIA-541.

Data and specifications subject to change without notice.  
This product has been designed and qualified for the Consumer market.  
Qualifications Standards can be found on IR's Web site.

International  
**IR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7903  
Visit us at [www.irf.com](http://www.irf.com) for sales contact information. 09/04