
THE CODY IS BROVIDED ON	A RESTRICTED BASIS AND IS NOT TO BE	LICED IN ANY M	/AV DETRIMENTAL TO THE IN	ITERESTS OF DA	NDUIT CORD
Material Material	High Conductivity Seamless Copper Tube	 	AT DETRIMENTAL TO THE II	TERES 15 OF FA	— .63 R Ref
Plating	Electro-Tin				.oo k ker
Wire Size	1/0 AWG	<u></u>	⊢ (₾\		
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric	.80±.04	PANDUIT 1/0 STR CU ICC1/0-12DH		
Wire Strip Length	1-1/2 in.				
Stud Size	1/2 in.	.47±.04 —	1.00±.02	_	53±.02 DIA (2) PLS
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.		, , , , , , , ,	ı	(=) - = -
UL Temperature Rating	90°C			Beveled v	wire entry—
C.S.A Certified Wire Connector	Yes			1.44±.0	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Panduit Color Code on Barrel	PINK			1.441.0	4 Million
Panduit Die Index No. on Barrel	P42			Y	
Alternate Industry Die Index No. () on Barrel	(12)				45°±:





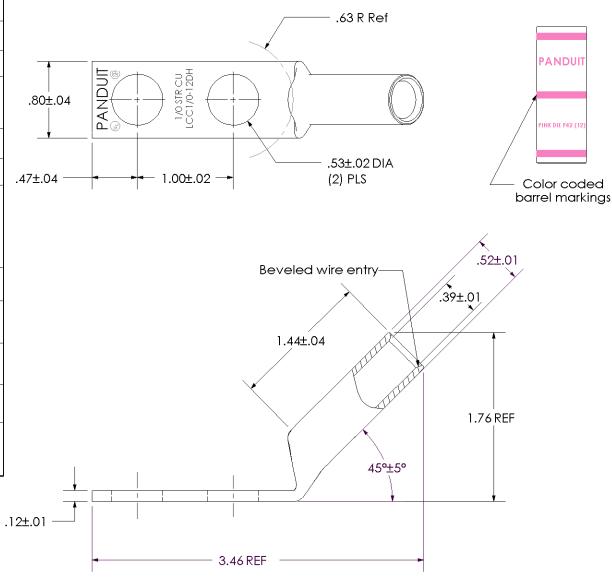

00 8/02 SAB DRL **RELEASED** 10334 REV DATE BY CHK ECN **DESCRIPTION**

CORP. TINLEY PARK, ILLINOIS

LCC1/0-12DH-X Copper Lug - Two-Hole, Long Barrel, 45° Angle Tongue

DRAWING NO / CAD FILE SCALE N/A

LCC1_0-12DH-CUST

PANDUIT

PINK DIE P42 (12)