



Series Datasheet – MK28 Reed Sensors

www.standexmeder.com

MK28 Series Reed Sensors

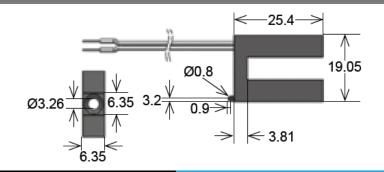

- Features: Vane Operated Screw Mount Proximity/Motion Sensor, Ideal in Harsh Environments
- > Applications: Water Meter Cursor Detection, Position Control, Locking System, Robotics & Others
- Markets: Automotive, Industrial, Robotics, Security & Other

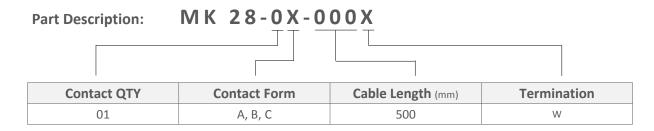

Customer Options	Switch Model	Unit
Contact Data	90	Unit
Rated Power (max.) Any DC combination of V&A not to exceed their individual max.'s	10	W
Switching Voltage (max.) DC or peak AC	175	V
Switching Current (max.) DC or peak AC	0.5	А
Carry Current (max.) DC or peak AC	1.0	А
Contact Resistance (max.) @ 0.5V & 50mA	150	mOhm
Breakdown Voltage (min.) According to EN60255-5	0.2	kVDC
Operating Time (max.) Incl. Bounce; Measured with w/ Nominal Voltage	0.7	ms
Release Time (max.) Measured with no Coil Excitation	1.5	ms
Insulation Resistance (typ.) Rh<45%, 100V Test Voltage	109	GOhm
Capacitance (typ.) @ 10kHz across open Switch	1.5	pF



USA: +1.866.782.6339 Europe: +49.7731.8399.0 Asia: +86.21.37820625 | salesusa@standexmeder.com | info@standexmeder.com | salesasia@standexmeder.com



Series Datasheet – MK28 Reed Sensors

www.standexmeder.com

Housing and Cable Specifications		
Housing Material	Nylon 6/6	
Case Color	Black	
Sealing Compound	Polyurethan	
Cable Typ	Flat Cable/Round Cable	
Cable Material	PVC	
Cross Section (mm²)	2 x 0.14 / 3x0,14	

Environmental Data		Unit
Shock Resistance (max.) 1/2 sine wave duration 11ms	50	G
Vibration Resistance (max.)	20	g
Operating Temperature Cable not moved	-30 to 70	°C
Operating Temperature Cable moved	-5 to 70	°C
Storage Temperature	-30 to 70	°C

Glossary Contact Form			
Form A	NO = Normally Open Contacts SPST = Single Pole Single Throw		
Form B	NC = Normally Closed Contacts SPST = Single Pole Single Throw		
Form C	Changeover SPDT = Single Pole Double Throw		







Handling & Assembly Instructions

- Max torque of screw is 1Nm
- Cable bending-radius is diameter x 15
- Min. bending distance to housing is 5mm
- Drag mark out of the mounting area forbidden
- Decrease switching distance by mounting on iron
- Do not use magnetically inductive screws
- Series resistor recommended for > 5m cable length

*Load increase reduces life expectancy of Reed Switches Load Life time