


NOTES:

- 1. ASSEMBLED PART #: HFA163090-0A2
- 2. CASE COLOR: BLACK-0A2.
- 3. CORE DIMENSIONS REFER TO HFA163090-000 SPEC. FERRITE CORE DIMENSION IS FOR INTERNAL PURPOSE TO ENHANCE FITTING TO CASE AND ELECTRICAL CHARACTERISTICS ONLY.
- 4. COSMETIC SPECIFICATION REFER TO WI-QA-038.

	NET IMPEDANCE (Z)								
Frequency	300 MHz	500 MHz	1 GHz						
Nominal (REF)	210 Ω	_260 Ω	200 Ω						
Minimum _	- Ω	_208 Ω	- Ω						

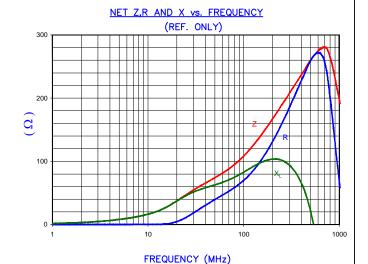

AGILENT E4991A Impedance/Material Analyzer HP 16092A-Test Fixture REF 2928

UNCONTROLLED DOCUMENT

CASE DIMENSIONS:

Α	20.07 [.790]	<u>+</u>	1.00 [.039]
В	9.07 [.357]	<u>±</u>	1.00 [.039]
С	41.55 [1.636]	<u>+</u>	2.00 [.079]
D	21.57 [.849]	<u>+</u>	1.00 [.039]
Ε	5.74 [.226]	<u>+</u>	REF.

	DIMENSIONS ARE IN mm [INCHES]. This print is the property of Laird							
D	UPDATE CASE DIMENSIONS REMOVE CORE DIM AND ADD NOTE 3&4	01/13/14	Jcai	Tech. and is loaned in confidence subject to return upon request and with the understanding that	Laird			
С	UPDATED LOGO	03/13/13	QIU	no copies shall be made without				
	UPDATE CORE PROFILE FOR UPDATED CASE DESIGN CHANGE CASE TOLERANCES	08/23/07	ТМВ	the written consent of Laird Tech. All rights to design or invention are reserved.				
В	TO REF. UPDATE CASE DIMS ON CASE &			PROJECT/PART NUMBER:	REV	PART TYPE	E:	DRAWN BY:
	ADD E DIM TO CASE REMOVE CORE & CASE P/N REFERENCE REVISE NOTES			HFA163090-0A2	D	FERRI SNAP-	—	JRK
	UPDATE COMPANY LOGO			DATE: 09/03/04	SCALE:	NTS M	ATERIAL:	
Α	ORIGINAL DRAFT	09/03/04	JRK	CAD #	TOOL # Ferrite		te	
REV	DESCRIPTION	DATE	INT		_			